

Retail Pos 100

Thermal Receipt Printer

The Retail Pos 100 Printer is distinctive
In its small size, but don't underestimate
It's abilities.



The Retail Pos 100 has Drop & Load Print making it easy to change rolls.



The Retail Pos 100 has a wide Thermal Receipt, up to 3" (80mm)




Retail Pos 100

30% Smaller
Than Standard
Receipt Printer



Big on Style & Performance –
Small & Powerful

Key Features - At A Glance

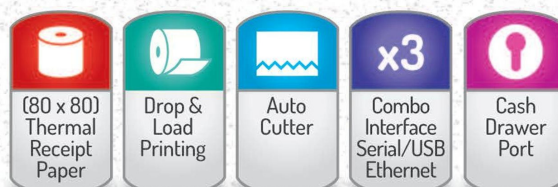

Retail Pos 100

Thermal Receipt Printer




- 30% Smaller Than Standard Printer.
- Energy Star Certified Reduces Energy Costs & Carbon Footprint.
- Fast Speed of 250mm Per Sec.
- Full Sized 80 x 80 Thermal Roll.
- Triple Interface as Standard – Serial/Ethernet/USB.
- Jam Free Technology.
- Durable Ceramic Auto Cutter.
- Optional Splash Cover.
- Optional Kitchen Bell.

Features

- Triple Interface Standard – Serial + Ethernet + USB.
- Guillotine Style, Jam-Free Auto-Cutter.
- Black/Red or Black/Blue Two-Colour Printing Available on Appropriate Paper.
- Accepts 2-1/4" (58mm) or 3-1/8" (80mm) Thermal Paper Rolls.
- Stores/Prints User Defined Graphic Logos, Coupons or Advertising Messages.
- Stores Up to 255 Images (384) Kbytes in Non-Volatile Memory.
- Easy-to-Use Utilities Simplify Loading Images and Watermarks.
- Built-in Wall Mount Capability.
- Integrated Kitchen Bell Interface.

Retail Pos 100 Specification

ITEMS	Printing Speed	Maximum 250mm/Sec.
	Resolution	180DPI.
	Printing Width	Maximum 72mm.
PAPER	Loading	Drop-In Type.
	Dimension	80mm (Maximum) x Ø83mm.
	Auto Cutter	Guillotine Type (Jam-Free).
MEMORY	PGM Memory	2 Mbyte.
	Data Memory	8 Mbyte.
	Data Buffer	64KB
RELIABILITY	Mechanism (MCBF)	70,000,000 Lines.
	TPH	1 x 108 Pulse, 150Km.
	Auto Cutter	1,500,000 Cut.
	Drivers	Windows Driver, OPOS Driver, Linux Driver, Mac Driver, Android SDK.
	Drawer Port Interface	2 Ports (+24V). USB + RS-232 (RJ-45) + Ethernet (Standard), USB + Wi-Fi (Optional).
OPTIONS	Dimensions	120(H) x 142(D) x 128(W)mm.
	Kitchen Bell	Yes.
	Splash Cover	Yes.
	Paper Partition	Yes (Default).
BARCODE		UPC-A, UPC-E, EAN8, EAN13, Code 39, Code 93, Code 128, ITF, CODABAR, PDF417, QRCode.
DRIVERS		WEPOS, POSReady2009, Windows XP Pro, Windows Vista, Windows 7 Pro, POSReady 7, Windows 8 Pro, Industry 8, OPOS, JPOS, Linux Cups, Mac (OSX 10.8), Android SDK.
SUPPLY VOLTAGE	Input Voltage	100-240V AC.
	Frequency	50-60 Hz.
	Output Voltage	24V DC.

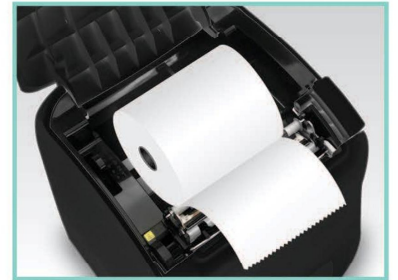


The Retail Pos 100 has 'Drop & Load' print making it easy change rolls.



The Retail Pos 100 has a wall mount Option, ideal if space is tight.

Ports and Connectivity

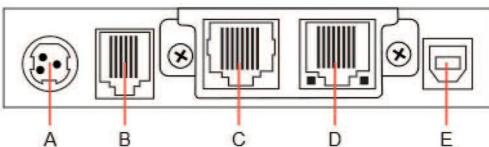

- A: DC 24V Power-In
- B: Cash Drawer
- C: Serial
- D: Ethernet
- E: USB



YOUR LOCAL DEALER IS

